
RESIDENTIAL & COMMERCIAL ELEVATORS



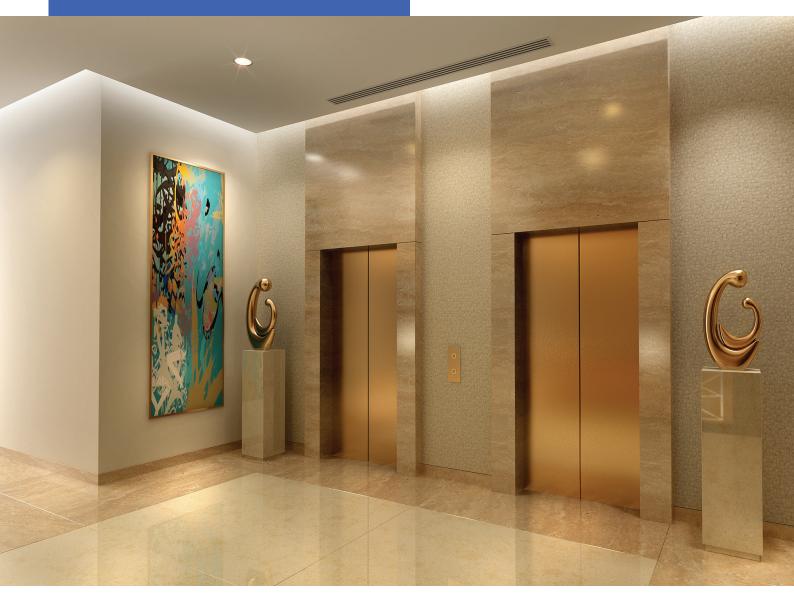

Our range of products

Home Elevators Freight Elevators Hospital Elevators Automobile Elevators Dumb Waiters

Monarch is one of the fastest growing companies in the vertical transportation industry with in house R&D and manufacturing facilities. Safety and reliability form a part of our core values.

With our elegant design and best-in-class functionality, Monarch elevators are perfect blend of our technical expertise and Indian design sensibilities. It also underscores our commitment to the 'Make in India' initiative.

We have formed a strong 'technical team' with years of experience to provide necessary inputs at design stage, sales, installations and after sales service. Our services will be the best in class to support our customer while exceeding their expectations.

Monarch Elevator manufactures a full range of geared or gearless, machine-room or machine-roomless elevator in india. With over 33 years of experience, we've become one of india's leading elevator company with unique engineering capabilities to meet vertical traffic needs.

We cater to many sectors in real estate such as,

Residential Buildings:



Restaurants:



Shopping Centres:



Office Buildings:



Hospitals:



Factories and Warehouses:



Reasons to Choose Our Elevators



Energy Efficiency:

Gearless technology with use of Regenerative and power saving LED lighting.



Best In Comfort:

Anti vibration rubber pads with VVVF Drive gives better comfort



Lower Noise:

Very silent operation and low Running noise.



Design Innovative:

Our award winning design helps your elevator standout



Smooth Ride:

Smooth ride comfort for best passenger experience



Environmental Protection:

Lubrication free, space saving layout



Safety And Reliability:

Monarch Rescue device for power failure multibeam sensor for doors and Accurate levelling



Long Life Span:

High quality bearings, nylon guide shoes, High tension ropes increases life span in full load conditions



Monarch (GMH) Series

Gearless Machine Room Hospital Elevator

These elevators are designed especially for hospitals with solid features having smooth and safe ride for patient transportation.

Advantages:

• Smooth entry and exit:

Accurate levelling for easy entry and exit of wheelchairs, beds and patients.

Quiet operation:

It prevents disturbance to other patients in wards adjacent to elevator shaft.

• Specialised car design:

It accommodates the bed and medical equipment with wide opening doors and deeper car.


Safety and comfort:

Advanced door sensor ensures safe door movement for patients safety and smooth ride for patient comfort.




Construction Parameters


Gearless Machine Room Hospital Elevators-GMH series

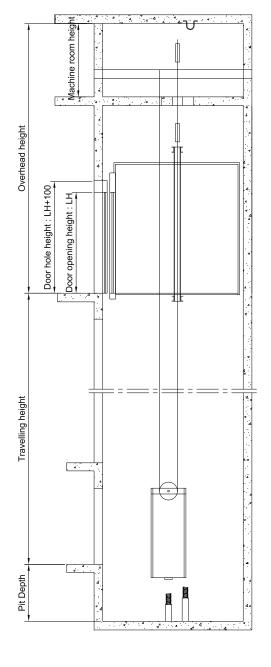

Shaft Vertical Section-'X-X'



Machine Room Plan

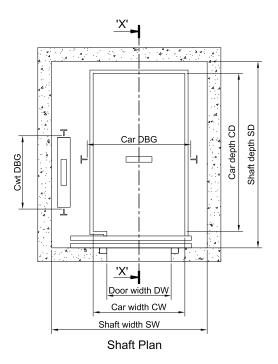

Standard Dimensions											
No. of Passengers	Load (kg)	Speed (m/s)	Car Width (CW)	Car Depth (CD)	Shaft Width (SW)	Shaft Depth (SD)	Door Opening (DW)	Pit depth	Min.Headroom height		
15	1020	0.5 / 1.0	1000	2400	1800	3000	900	1600	4200 / 4500		
20	1360	0.5 / 1.0	1300	2400	2200	3000	1200	1600	4200 / 4500		
26	1768	0.5 / 1.0	1600	2400	2400	3000	1200	1600	4200 / 4500		

Monarch (GLH) Series

Gearless Machine Roomless Hospital Elevator

These elevators are a solution for hospitals without machine room. They are designed for enhanced experienced for patient transportation.





Advantages:

• Optimum space utilization:

Low Head room and standard shafts are utilized for larger car area and less machine installation space.

Energy efficiency:


Gearless machines using the advanced permanent magnet motors reducing power consumption substantially.


• Intelligent call management:


Emergency Alarm call button help the patients to communicate with the security and building management personal at any given point of time.

Construction Parameters

Gearless Machine Roomless Hospital Elevators-GLH series

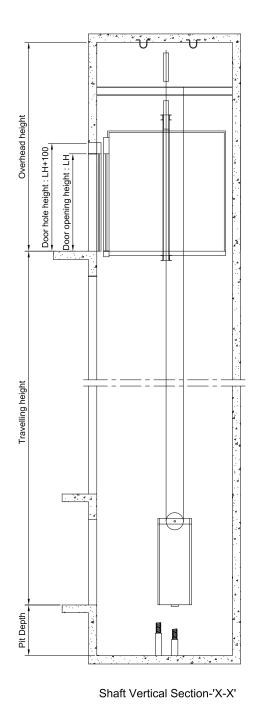



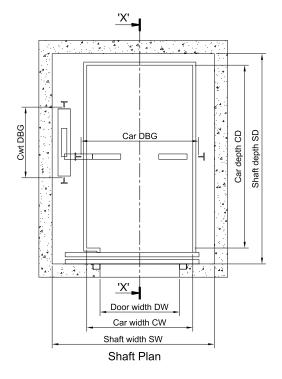

Standard Dimensions											
No. of Passengers	Load (kg)	Speed (m/s)	Car Width (CW)	Car Depth (CD)	Shaft Width (SW)	Shaft Depth (SD)	Door Opening (DW)	Pit depth	Min.Headroom height		
15	1020	0.5 / 1.0	1000	2400	1800	3000	900	1600	5000		
20	1360	0.5 / 1.0	1300	2400	2200	3000	1200	1600	5000		
26	1768	0.5 / 1.0	1600	2400	2400	3000	1200	1600	5000		

Cabin Options



Classic Powder Coated Finish



Modern Stainless Steel



Exquisite Mirror Finish



Luxury Golden Mirror Etched



Ultra Luxury Rose Gold Finish



Black Mirror Finish

Cabin Options



Designer Stainless Steel



Mild Steel Powder Coated Finish



Stainless Steel Finish



Wooden Finish



Designer Wooden Finish



Golden Mirror Finish

Door Options



Stainless Steel Centre Opening



Stainless Steel Telescopic



Stainless Steel Small Vision Door



Stainless Steel Big Vision Glass Door



Ms Powder Coated Centre Opening



Ms Powder Telescopic Door



Stainless Steel Etched Finish



Stainless Steel Mirror Finish Door

Have you ever noticed how people waiting for an elevator tend to stand and look straight ahead? With that much attention, your elevator entrances better look good.

Monarch offers a variety of entrances to meet your needs for aesthetics and functionality. Centre-opening and side-slide openings are available inseveral stainless steel and painted finishes to add to the visual appeal of your lobby & hallways.

With Monarch you can choose from a wide variety of colours and finishes to complement your architectural style. In fact you can create a custom look by mixing and matching the choices that are available to you.

Car Ceilings:









Designer Floorings:









Handrails:





Car And Landing Operating Panels



LCD And TFT Display





Elevator Functions

Automatic turn-off of elevator

light and fan

: Standard, : Option Operating systems This is a fully automatic operation used for a single elevator system. Hall calls in the direction in which the elevator is travelling are responded to sequentially and when all Simplex collective control 1 calls in that direction are cleared, calls in the opposite direction are responded to. When there are no more calls, the elevator will stop at the last floor served. This is a fully automatic operation used for a two-elevator system. Hall calls are responded to by whichever elevator that can serve the hall call faster. When there are 0 **Duplex collective control** 2 no more calls, one of the elevators will stand by at the stand by floor while the other elevator will stay at the last floor served. Service functions For this system the stop floor is manually set by an attendant such as in a department 0 1 Attendant operation This operation system is used when there is a need to serve special passengers. Under 2 **Independent operation** this operation, all hall calls are disabled for the elevator and it is reserved for exclusive use of the special passengers. When duplex collective control or group control is used a selector switch on the control 3 Separated simplex operation panel is used to switch between parallel operation and independent operation. An interphone system is provided for emergency communication between the elevator 4 Interphone system and the master unit on the ground floor. 5 Floor lock-out operation Specific service floors can be locked-out by activating a switch. Temporary call registration of By inputting a pre-programmed code using the car operating board floor buttons, 6 certain restricted floor passengers can gain access to certain restricted floors. Safety functions **Abnormal speed protection** In the event that the elevator is moving downwards at an abnormally high speed, the 1 function brakes will be automatically engaged and the elevator will cease operation. In the event that the elevator stops out of the door-open zone of a selected floor, doors 2 Out of door-open zone alarm will not open, and an alarm will be sound in the elevator. When the elevator stops out of the door-open zone, it will move to the nearest floor at 3 Rescue operation slow speed to release passengers. Automatic correction of elevator landing level when there is a level difference between 4 Micro-leveling In the event of a power failure, an emergency light inside the elevator will be 5 Car emergency lighting automatically activated. In the event of a power failure, this emergency supply allows the operation of a light, fan **Emergency battery** 6 and alarm bell In the event that the beam paths are obstructed, this sensor, installed at the edge of the Multi-beam door sensor doors, will keep the doors open. Information functions IC auto announcement Preset standard messages are announced to the passengers. 0 (English) An electrical chime (located at the top and bottom of the elevator) will sound 0 Arrival audio signal just before the arrival of the elevator Energy-saving functions When traveling downwards with a heavy car load or upwards with a light car 0 Regenerative system load, the traction machine acts as a power generator to transmit power back to the electrical network in the building.

In the event that the elevator is not in use, the light and ventilation fan in the

elevator are automatically turned off to conserve energy.





- Jyoti Studio Compound, Kennedy Bridge, Nana Chawk, Grant Road, Mumbai - 400 007. INDIA
- & 91-22-2387 1808 / 2387 7014
- info@monarchelevator.com raman@monarchelevator.com
- www.monarchelevator.com